



TSA5L80

Features

DO-201AD

TSA5L80




Cathode → Anode

Applications


Maximum ratings and electrical characteristics (TJ = 25°C unless otherwise noted)

11


RATINGS AND CHARACTERISTICS CURVES

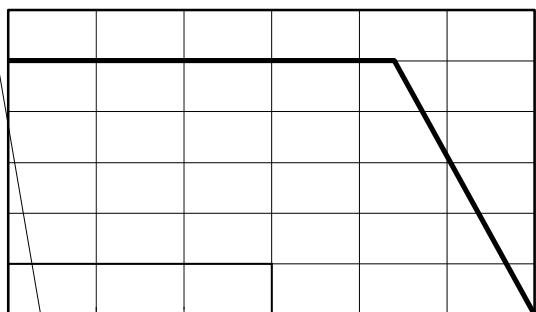


Current Derating, Case

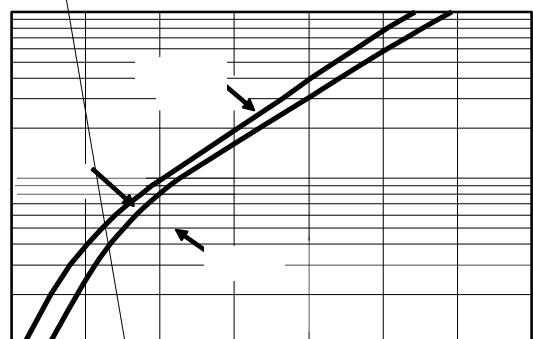

Typical Forward Voltage

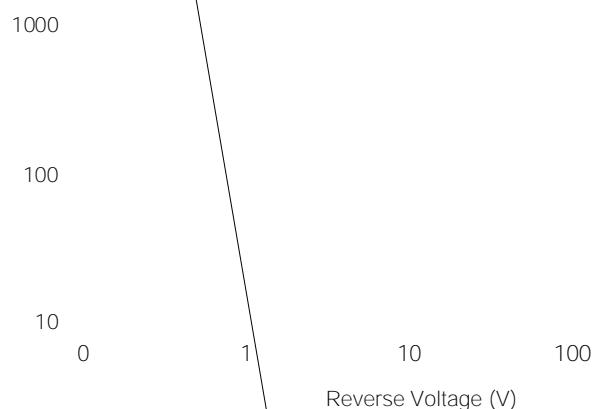

Typical Junction Capacitance

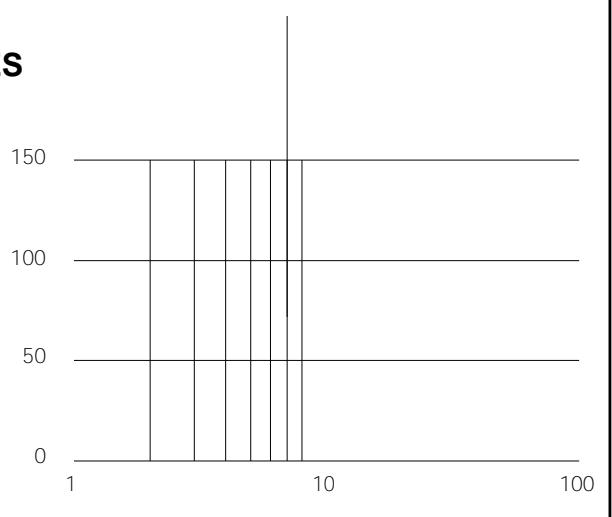

Maximum Repetitive Surge Current


Typical Reverse Current

829 m 189.35 0 I S Q7.2 0 0 1 341.4620361 6



()

PACKAGE OUTLINE DIMENSIONS

DO-201AD

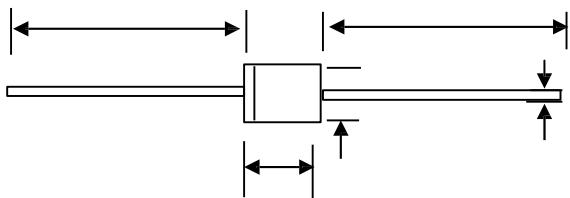

				1.4	
				1.1	
				.1	

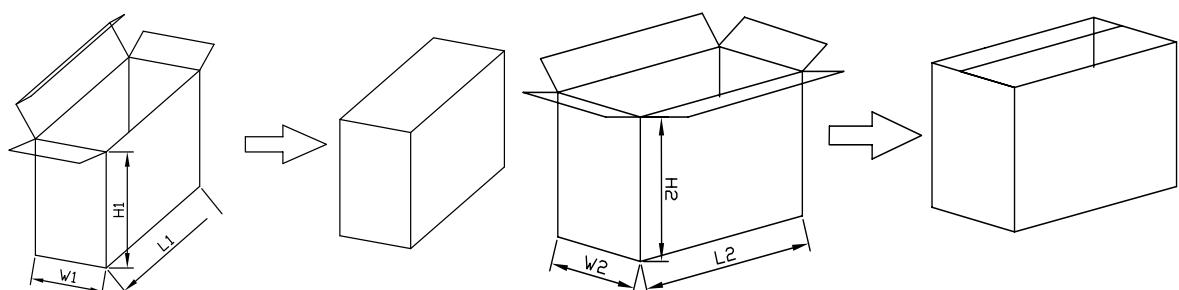

				4	4		