

Features

DO-201AD
TSA5L100



Applications


Cathode  Anode

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)


			15	

0


RATINGS AND CHARACTERISTICS CURVES

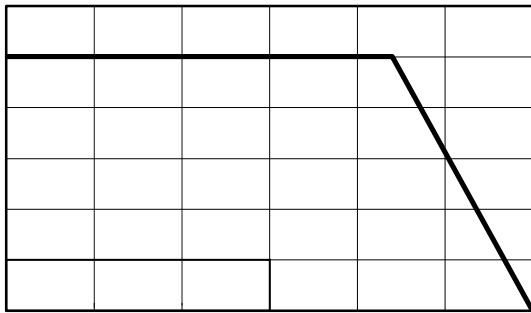


Current Derating, Case

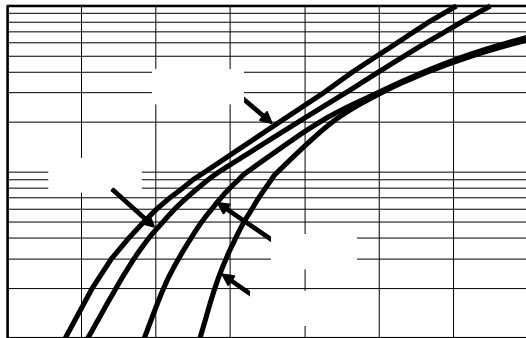


Typical Forward Voltage

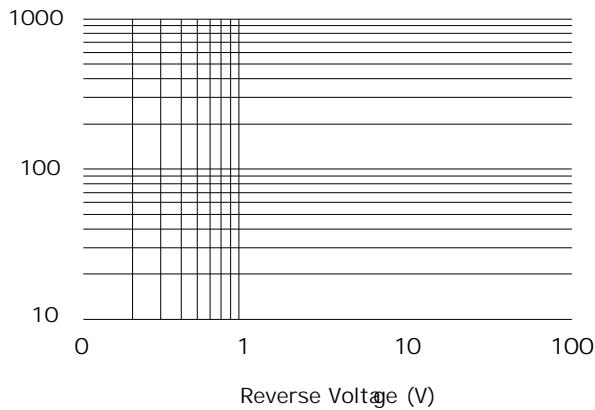

Typical Junction Capacitance

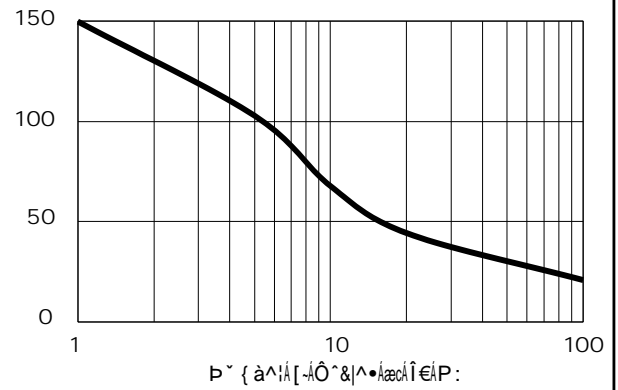


Maximum Repetitive Surge Current

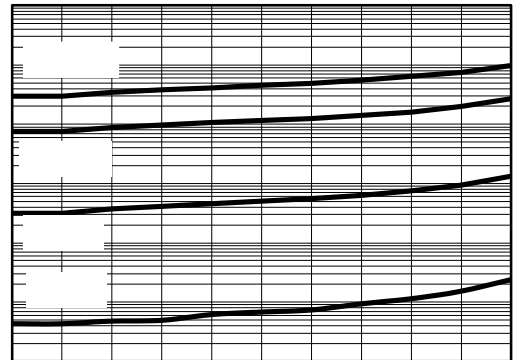

Typical Reverse Current

PACKAGE OUTLINE DIMENSIONS



DO-201AD

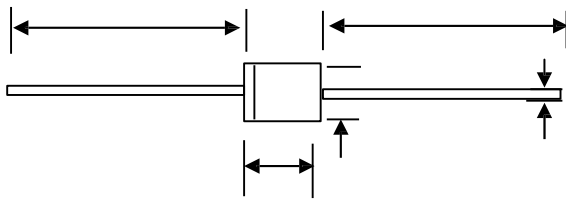

				C	
				1.4	
				1.1	
				5.1	

0DUNLQJ ,QIRUPDWLRQ

7

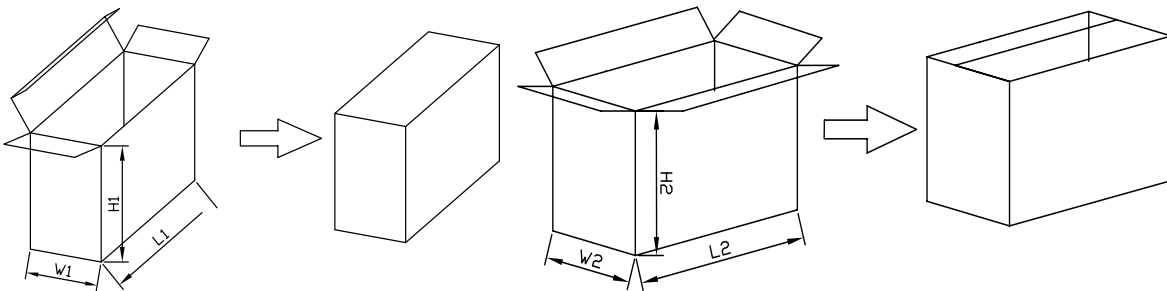

				4	4		