

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

TO-220AB
TSR & 7



1 2 3 4

ITO-220AB
TSR & 7)



Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZDWRGWDJH GURS
- ‡ /RZRZDWRVHV
- ‡ +LJKILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &RPSOLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZDSSOLHV
- ‡)UHHZKH)HLQJ

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)


3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXPHSHVSHUNYHYURQHW DJH		9550		9
0D[LXPYHURDJH ZDUG UFKUWHIHWG		,) \$9		\$
GHYLFH SHGLRGH				
3HDN IRVZDWRUHQW VLQDQH ZDYH		,) 60		\$
VXSHULPSRVHGRSGLDVGHG				
2SHUDMXQDQWRUDJH WHPSHUDW		X0H 060JH	50 WR	f &
7\SLFVCHUPDO USHVULVQHDQFH		5\$ - &		f & :
72 \$% , 72 \$%				
, QVWDQWDQHRXUWUJZDUG SHGLRGH		9)	7 < 3	0\$;
	,) \$		7- f &	
	,) \$		7- f &	
	,) \$		7- f &	
, QVWDQWDQHRXUWUJZDUG UDWHYHYURQHW DJH		, 5		X \$
			7- f &	P \$

1RWHV
3XOVH WHVVSXOVH ZLGWK GXW\ F\FOH
3XOVH WHVW 3XOPH ZLGWK 0


[Empty rectangular box]

[Empty rectangular box]

Marking Information

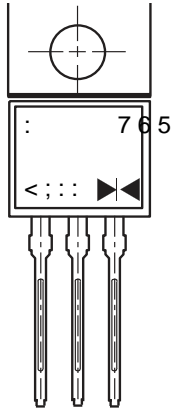


3 URGXFW 765 910 & 7 RU 765 (7)
 3' & LQIRUPDWLRQ

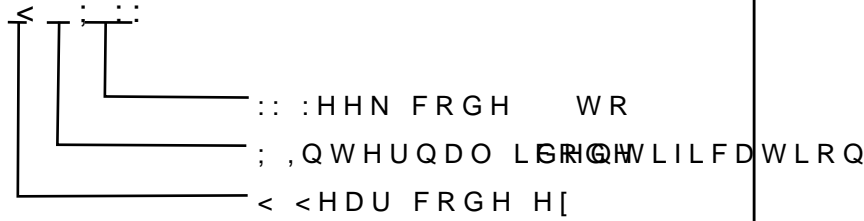

Packaging Information

7XEH 'LPHQVLRQV

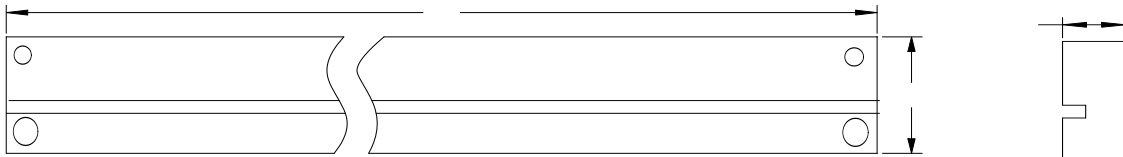

,QVLGH %R[

2XWVLGH %R[

Packaging Information

12	81,	7XEH 'LPHQVLRQV			,QVLGH %R[2XWVLGH %R[
6L]H	PP	\$	%	&	/	:	+	/	:	+
47<	3&6	3&6 7XEH			6PDO SHFWDJH3&6 WXEWRWDO			3&6 FDUERGLWRWDO		
1RWH		7ROHUDQFH PP" PP			PP" PP			PP" PP		